
DESM5035 Outside frame mounting kit for SC35

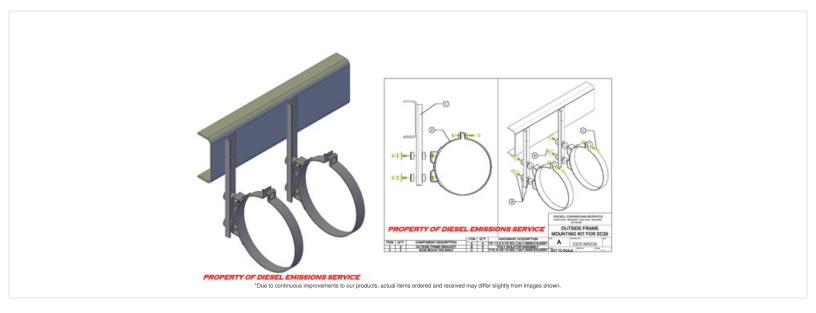

Features:

- DESM5035 mounting kit brackets are designed to mount the SC35 "passive" systems by mounting directly around the center body.
- Brackets are constructed from 1/4" mild steel.
- Mounting bands are constructed from 3/16" mild steel. (included)
- Brackets are powder coated black. Filter mounting bands are powder coated "HI TEMP" black.
- Hardware (hex bolts, flat washers, nylock nuts) are yellow zinc chromate, grade 8 (included).

Installation:

- 1. Care should be taken to ensure no air lines, fuel lines, and/or wiring is between frame and brackets before tightening.
- 2. Brackets must be assembled as shown and hardware torqued to **listed standards, CAUTION! Tighten band hardware as necessary to prevent crushing of the filter outer can FAILURE TO DO SO MAY CAUSE DAMAGE TO THE "DPF" SYSTEM
- 3. Position the filter mounting brackets to ensure adequate ground clearance between filter and roadway.
- 4. **TORQUE SPECIFICATIONS: 3/8-16 GRADE 8 (40-50 ft lbs.) 7/16-14 GRADE 8 (60-75 ft lbs.) 1/2-13 GRADE 8 (90-110 ft lbs.)