



DESM9019/M9020

DONALDSON 9.5"-10.5"

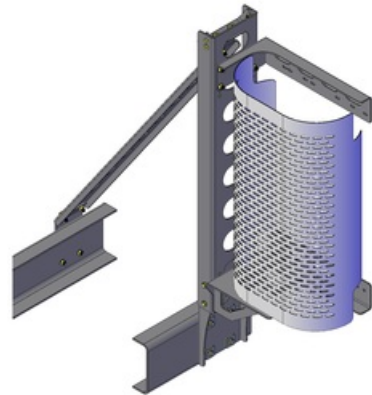

PROPERTY OF DIESEL EMISSIONS SERVICE

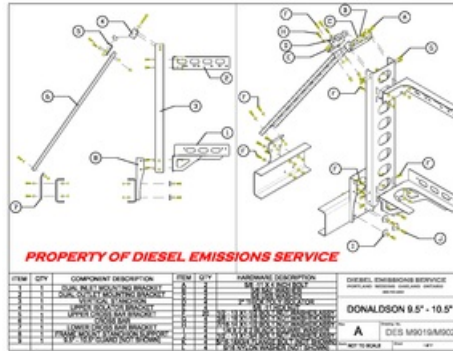

*Due to continuous improvements to our products, actual items ordered and received may differ slightly from images shown.

Features:

- DES M9019/M9020 mounting kit is designed to mount the Donaldson 9.5 and 10.5 Dual DPF system.
- Cross bar support utilizes POLY isolators.
- Constructed and welded using mild steel
- All parts are powder coated black
- Guard (Included but not shown) made from Marine Grade Aluminum with a bright finish
- All hardware (hex bolts, flat washers, nylock nuts) are yellow zinc chromate, grade 8 (included).

Installation:

1. Brackets must be assembled as shown and hardware torqued to **listed standards, FAILURE TO DO SO MAY CAUSE DAMAGE TO THE DPF SYSTEM OR INJURY TO PERSONS.
2. DO NOT tighten isolation hardware to the listed torque specifications! Reasonable care should be taken to ensure equal compression and avoid excessive compression of the isolator.
3. After filter and guard are installed, ensure the DPF system does not obstruct or impair the drivers use of the mirrors.
4. ** TORQUE SPECIFICATIONS: 3/16-18 GRADE 8 (40-50 ft lbs.) 7/16-14 GRADE 8 (60-75 ft lbs.) 1/2-13 GRADE 8 (90- 110 ft lbs.)