



DESM8010

HUSS MK200/MK300

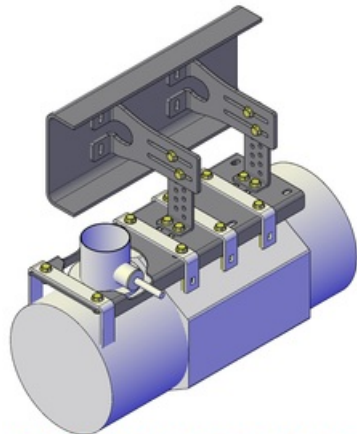

PROPERTY OF DIESEL EMISSIONS SERVICE

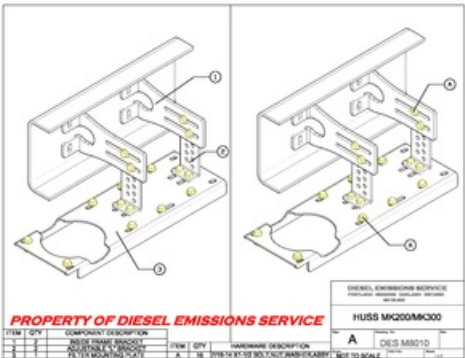

*Due to continuous improvements to our products, actual items ordered and received may differ slightly from images shown.

Features:

- Constructed from 1/4" and 3/8" mild steel.
- All parts are powder coated in black.
- All hardware (hex bolts, flat washers, nylock nuts) are yellow zinc chromate, grade 8 (included).

Installation:

1. Care should be taken to ensure no air lines, fuel lines, and/or wiring is between frame and brackets before tightening.
2. Brackets must be assembled as shown and hardware torqued to **listed standards, FAILURE TO DO SO MAY CAUSE DAMAGE TO THE "DPF" SYSTEM
3. Position the adjustable filter mount to ensure adequate ground clearance between filter and roadway.
4. Maintain adequate clearance between drive train components.
5. **TORQUE SPECIFICATIONS: 3/8-16 GRADE 8 (40-50 ft lbs.) 7/16-14 GRADE 8 (60-75 ft lbs.) 1/2-13 GRADE 8 (90-110 ft lbs.)