


DESVM6006

H-Duty 3 Piece vert mount w/ isolators (straight)

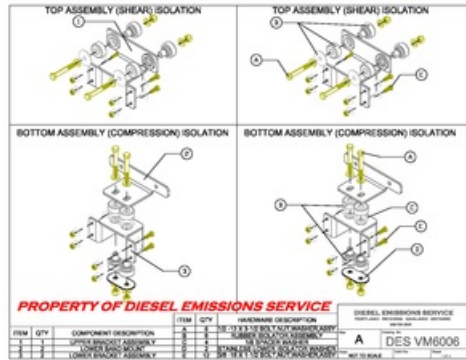

PROPERTY OF DIESEL EMISSIONS SERVICE

*Due to continuous improvements to our products, actual items ordered and received may differ slightly from images shown.

Features:

- DESVM6006 mounting kit brackets are designed to mount "passive" DPF systems (NOT EXCEEDING 125 lbs.) vertically utilizing rubber isolation.
- DESVM6006 mounting kits are designed to bolt directly to our DESVM6004 Stanchion kit.
- Constructed and welded using mild steel.

Installation:

1. Brackets must be assembled as shown and hardware torqued to **listed standards, FAILURE TO DO SO MAY CAUSE DAMAGE TO THE "DPF" SYSTEM OR INJURY TO PERSONS.
2. Do not tighten isolation hardware to the listed torque specifications! Reasonable care should be taken when tightening, to ensure equal compression and avoid excessive compression of the isolator
3. After filter and heat shield are installed, ensure the DPF system does not obstruct or impair the drivers use of the mirrors.
4. **TORQUE SPECIFICATIONS: 3/8-16 GRADE 8 (40-50 ft lbs.) 7/16-14 GRADE 8 (60-75 ft lbs.) 1/2-13 GRADE 8 (90-110 ft lbs.)