
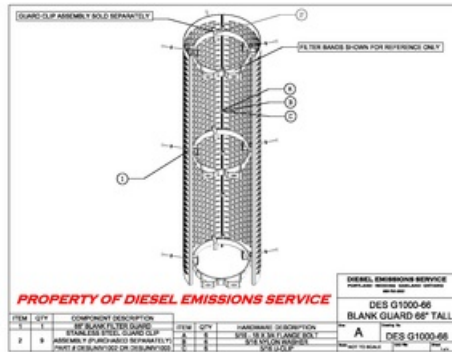


DESG1000-66

Blank guard 66" tall 2 pieces

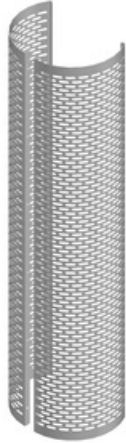

PROPERTY OF DIESEL EMISSIONS SERVICE

*Due to continuous improvements to our products, actual items ordered and received may differ slightly from images shown.

Features:

- DESG1000-66 2 piece guard is 66" long and 15.5" in diameter and is constructed from 5000 series marine grade aluminum.
- The guard offers protection for approximately 225 degrees of the DPF surface.
- The guard is mounted to the DPF with stainless steel guard clips (DESUNIV1002 and DESUNIV1003) purchased separately.
- The oblong holes in the guard provide unlimited bolt holes to mount the guard with.
- The guard is manufactured and shipped with protective PVC tape on the face which keeps the guard virtually free of blemishes during the installation.

Installation:

1. Position the guard over the DPF mounting bands and mark the appropriate holes to be used when mounting the guard.
2. Peel PVC tape away from designated holes before installing any hardware.
3. Install mounting hardware being sure to include the anti vibration nylon washer provided with your guard clip purchase.